

### General Description

Glass fiber mesh fabrics combined with specially designed mesh surface treatments can be used in a wide range of applications.

We offer R 96 fabrics as an effective, customized solution for the prevention of cracks that form in render or reinforcement layer of external facades which are induced by construction techniques or temperature changes. It can also be used for a wide range of repair application, for example to bridge / cover any existing damage to wall surface.

### Technical characteristics

Works Standard: 0326 Glass Fibre Mesh Fabrics

Characteristics	Units Description	R 96 A101	
		Warp	Weft
Square Dimension	mm / informative value	4,1	4,1
Standard Width (1)	cm / individual value	100	
Roll Length (1)	m / individual value	50	
Treated Fabric Thickness	mm / informative value	0,50	
Loom state Fabric Weight	g/m <sup>2</sup> / informative value	98	
Treated Fabric Weight	g/m <sup>2</sup> individual value, minimum	118	
Treatment type	alkaliresistant without emollient, obstructing yarn drifting		

(1) Other dimension on request

Tensile strength (TS) and elongation:

Minimum individual tensile strength (N/50 mm) and maximum elongation (%) when reaching minimum tensile strength is ascertained according DIN EN ISO 13934-1 as per below.

	Tensile Strength		Elongation
	Nominal value	Individual value	Average value
Deposition method			
Standard condition	1800 / 1600	1500 / 1200	3,5 / 3,5
Fast Test (6 hours)	1300 / 1000	1000 / 800	3,5 / 3,5


### Additional Information

- **Quality inspection**  
The way of quality inspection, taking of the samples and taking over of the material, is according to 0326 works standard
- **Packing:**  
The rolls of fabrics are packed vertically in cardboard, on a wooden pallet. A precise method of packing is mentioned in the works standard for packing
- **Storing:**  
Packed rolls are to be stored in dry rooms. Storing temperature is from -10°C to + 50°C

### Technical Data Sheet

#### Properties

- Compatible with all types of rendering systems
- High dimensional stability
- Reliable reinforcement for external facades

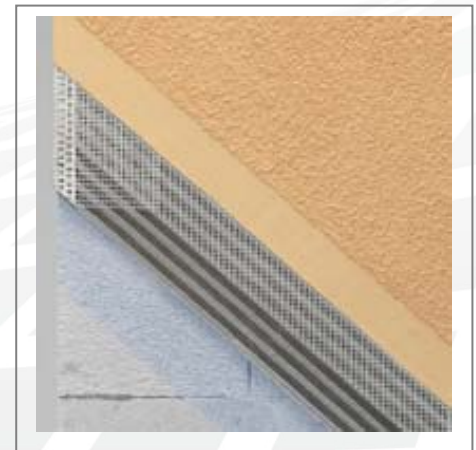

Edited by:

**ADFORS Construction Products Europe**

SAINT-GOBAIN ADFORS s.r.o.  
Sokolovska 106  
CZ – 570 21 Litomyšl  
Tel: + 420 461 651 111  
Fax: + 420 461 612 769  
www.sg-adfors.com

**ADFORS Construction Products Europe** reserves the right to change the information given herein without prior notice

Technical Data Sheet N° 6

Last update: 10/09/2012